



Overview

THULAFold™ is the first all **South African** Acoustic Operable Wall to enter the marketplace. Established in Johannesburg South Africa, we are proud to be the pioneers of this great new product and brand.

THULAFold™ is a refined operable wall designed to capture the essence of flexibility in the commercial and hospitality sector, allowing for maximum space management, for better revenue yield and all-importantly, **giving you options**.

Built from top to bottom, using locally sourced raw materials, **THULAFold™** makes the perfect product that meets the testing, design, and quality guarantee for the South African and African market.



The product

Made with the highest quality raw materials, THULAFold delivers a flexible ACOUSTIC walling solution, available in a centre stacking as well as side stacking option suitable for all design configurations. Our 80-100mm system offers a 48 & 51 STC rating based on what we believe to be the most versatile option for an acoustic operable wall. Simplifying the options gives our clients peace of mind that they will be receiving the very best value. With a wide range of modern finishes available. Protected by a concealed edge, we can offer eye catching and functional facings that will give the perfect aesthetic appeal to every wall we deliver. The partitions are designed and suitable for the following facilities:

Applications

- Conference Centres
- Auditoriums
- Hospitality
- Training Centres
- Schools
- Boardrooms






Features


- 48 – 51 STC Rating
- SoftCrank operating system for easy operation
- Improved acoustic interlocking vertical styles
- Magnetic seating technology for maximum panel guidance
- Additional tolerance for floors and ceilings
- World class track and carrier system
- **No sweep seals** our refined acoustic end seals means sweep seals are no longer necessary
- Easy installation





Centric

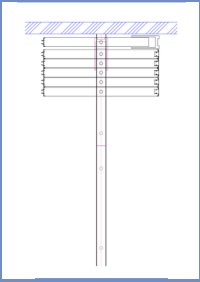

Flank

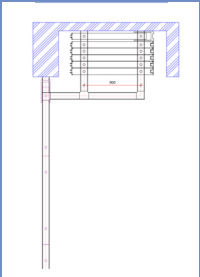

Sectional

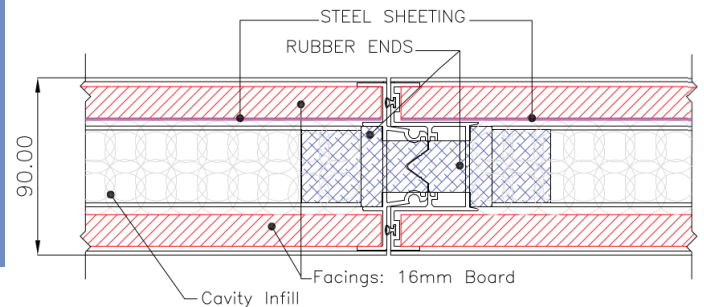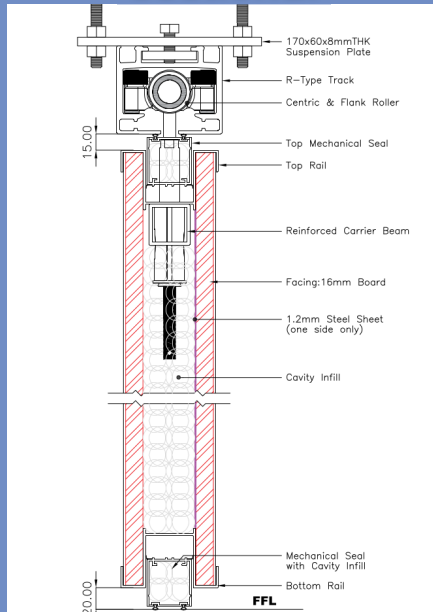

Specification

Supply & Install of **THULAFold™** acoustic operable wall (Centric) or (Flank) with 48 - 51STC rating to suit opening size (width & height) with (optional) facings, including telescopic top and bottom seals. Interlocking magnetic tech vertical styles and lever closure panel. Panel trims to be natural anodised or powder coated (specify). Suspended from track TYPE R including suspension components and acoustic baffle in ceiling void.